




"Where heat transfer vinyl
meets boundless creativity"

GLITTER HEAT TRANSFER HTV

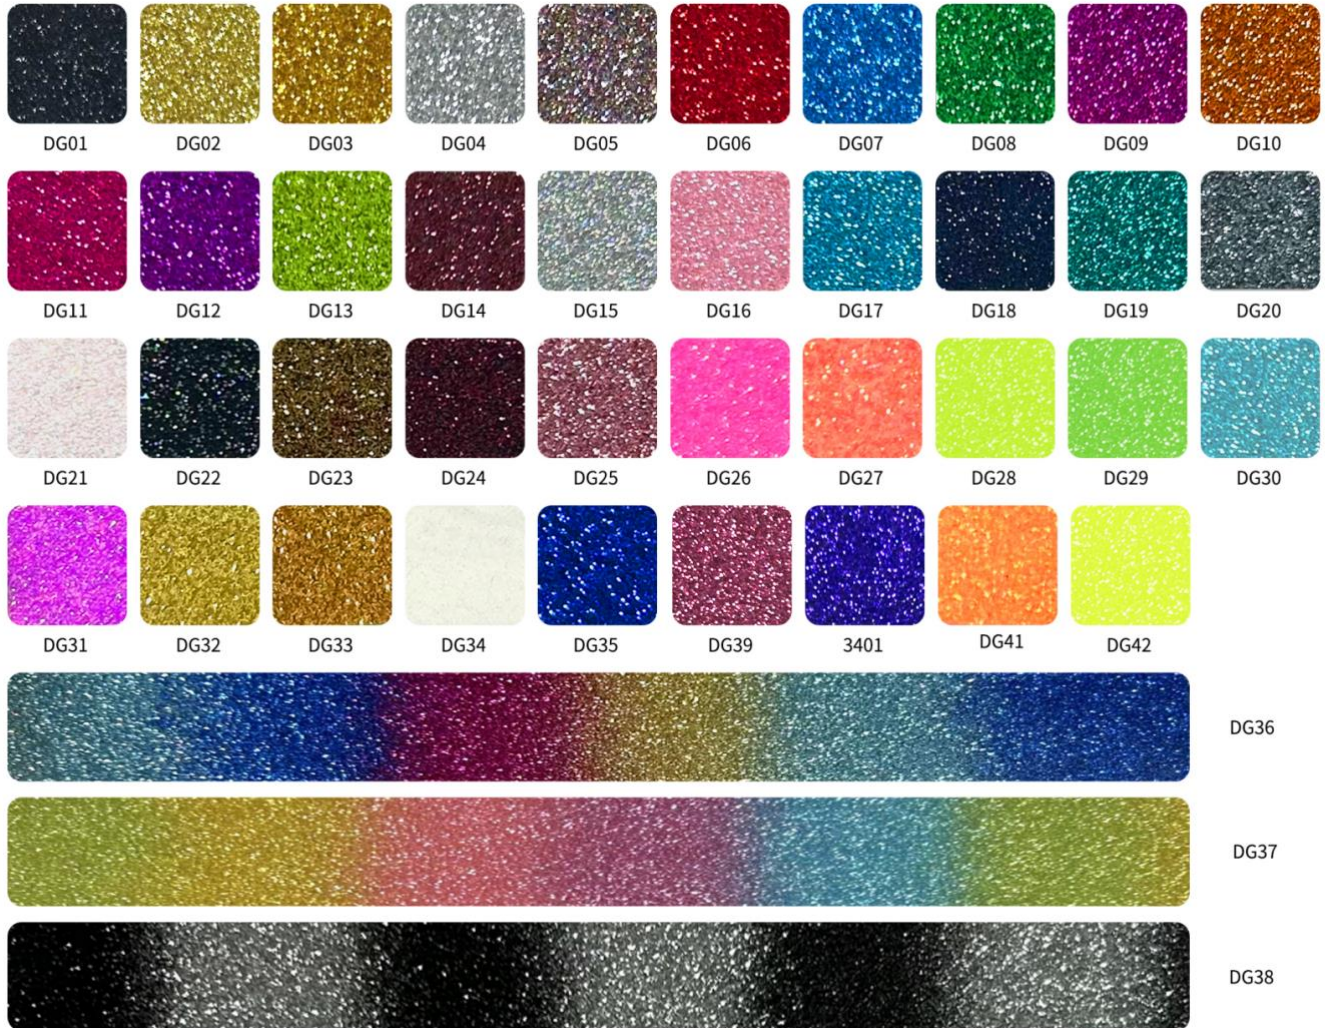

PRODUCT COMPOSITION

PET Layer 22.7%
 Sticker Layer 6.8%
 Color Layer 52.3%
 Hot Melt Adhesive Layer 18.2%

APPLICABLE MACHINES

Cutting Plotter, Film Cutting
 Machine, Laser Cutting Machine,

Marking Machine, Die-Cutting
 Machine

AVAILABLE SIZE

0.5*25m (customizable size)

THICKNESS

Overall Thickness: 0.44mm
 PET Thickness: 0.1mm
 Sticker Layer: 0.03mm

Color Layer Thickness: 0.23mm
 Hot Melt Adhesive Thickness:
 0.08mm

APPLICATION METHOD

Hot stamping
 temperature/time/pressure:
 145°C~160°C/12-15S/4-6KG/Mpa

PEELING METHOD

Warm Peel



*"Where heat transfer vinyl
meets boundless creativity"*

TECHNICAL DATA SHEET

Updated March 2025

WASHING FASTNESS

*Grade 4.5, National Standard
Grade 3.5*

DRYING TEMPERATURE

Below 60° C

APPLICABLE TEXTILES

*Pure Cotton, Polyester,
Poly/Fabric Blended*

APPLICATION SCOPE

*Clothing, Shoes And Hats,
Luggage And Other Items*